

THE

OHAUS ES SERIES

Low profile bench scales




Utility and economy come together in the ES Series of all-purpose bench scales. The low profile design of the ES Series scales makes them perfect for shipping, receiving, and general bench applications. Easy, two-button operation and a large display help guarantee accurate and unmistakable results. The unique 3-way mounting bracket allows you to mount the indicator to the scale base, above the scale platform, or on any vertical surface. For simple weighing at a favorable cost, the ES Series is the scale to choose.

- 6 Models to choose from: 6 kg to 200 kg (13.2 lb to 440 lb)
- Features kg, lb, oz and lb:oz units
- Plug and Weigh - Ready to use
- AC and battery power



Ohaus ES Series

Low Profile Bench Scales

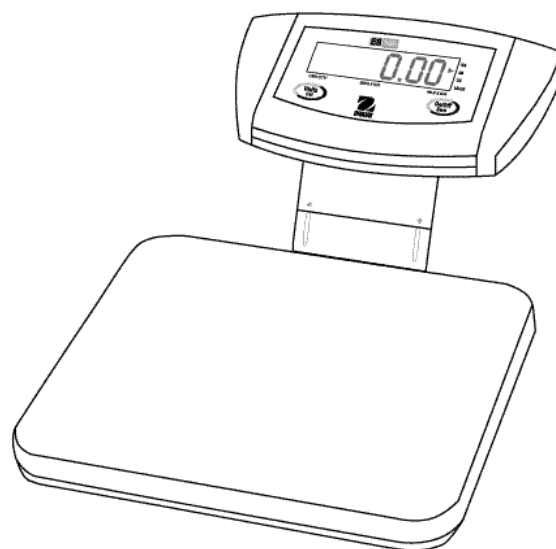

ES Series

Capacity x Readability	(kg)	6 x 0.002	30 x 0.01	50 x 0.02	50 x 0.02	100 x 0.05	200 x 0.1
	(lb)	13.225 x 0.005	66.1 x 0.05	110.2 x 0.05	110.2 x 0.05	220.4 x 0.1	440.8 x 0.2
	(oz)	211.6 x 0.1	1,058.0 x 0.5	1,763 x 1.0	1,763 x 1.0	3,526 x 2.0	7,050 x 5.0
	(lb:oz)	13:3 x 1 oz	66:2 x 1 oz	110:3 x 1 oz	110:3 x 1 oz	220:6 x 2 oz	N/A
Weighing Units		kg, lb, oz, lb:oz					kg, lb, oz
Base Size	(in/cm)	12.2 x 10.8 x 1.5 / 31 x 27 x 4			20.5 x 15.7 x 3 / 52 x 40 x 7.5		
Indicator Stand	(in/cm)	4 / 10					
Platform Construction		Stainless steel deck / black painted frame					
Scale Weight	(lb/kg)	6.6 / 3			33 / 15		
Shipping Weight	(lb/kg)	8.8 / 4			38 / 17		
Shipping Dimensions	(in/cm)	13 x 15 x 5.5 / 32 x 37 x 14			19 x 24 x 9 / 48 x 60 x 23		
Span Calibration		100%			50%		
Display	(in/cm)	1 inch / 2.54 cm digit height, LCD					
Keyboard		Two function membrane switches					
Power		9VDC / AC adapter (included) or six "AA" batteries (not included)					
Typical Battery Life		Up to 120 hours / 30 hours of continuous use					
Stabilization Time	(typical)	Within 3 seconds					
Storage Temperature		14° F to 158° F / - 10° C to 70° C					
Operating Temperature		14° F to 104° F / - 10° C to 40° C					
Item #		ES6R	ES30R	ES50R	ES50L	ES100L	ES200L

Meets Requirements of Approval Agencies:UL,FCC,CSA,CE Safety EN60950,Emissions EN55022,Immunity EN50082-1.

Standard Features

Easy two-button operation, stability indicator, auto-zero tracking, overload indicator, low power indicator, battery saving auto-off timer (after 5 minutes of inactivity), 3-way mounting bracket (mounts indicator to base, above base, or to wall), AC power adapter, large platforms feature leveling feet.

Simple to Order

Contact your local Ohaus dealer for product availability.

Ohaus Corporation
 * 19A Chapin Road
 P.O. Box 2033
 Pine Brook, NJ 07058 USA
 Tel: 973.377.9000
 Fax: 973.593.0359
 www.ohaus.com

*With offices throughout Europe,
 Asia, and Latin America*

*** ISO 9001**
 Registered Quality Management System

LUS03-00 REV01-01 © Copyright Ohaus Corporation

